


UPK

Extract-air grille

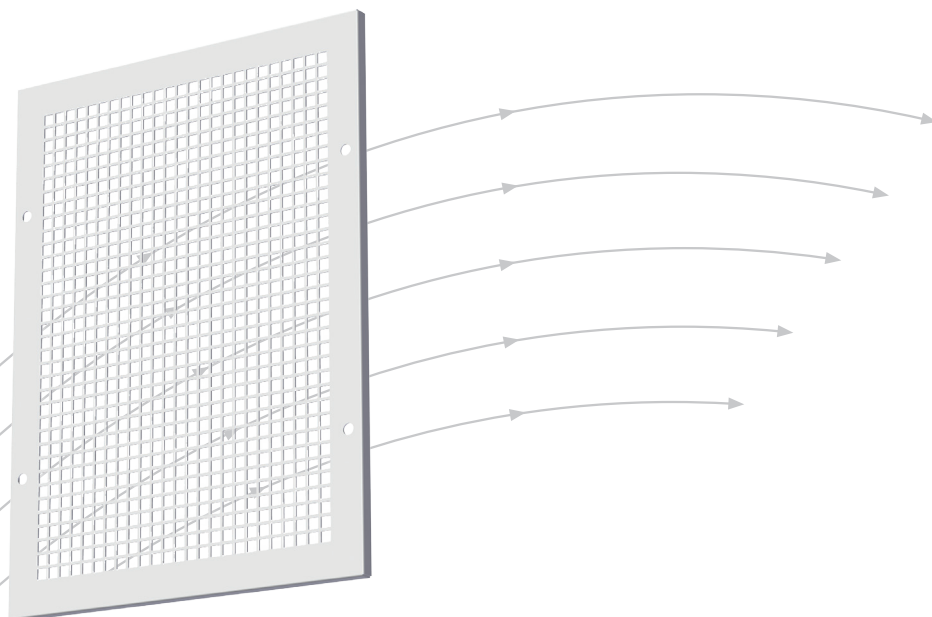

- Bespoke dimensions, BxH variants
- Available with and without plenum box

TROX[®] TECHNİK

 **Auranor**

TROX Auranor Norge AS

PO Box 100
NO-2760 Brandbu

Telefon +47 61 31 35 00
Telefaks+47 61 31 35 10
e-mail: firmapost@auranor.no
www.trox.no

UPK (BxH)

APPLICATION

UPK is an air-extract grille for wall mounting. It is available in bespoke dimensions and can thus be adapted to fit various groove dimensions or pre-installed boxes.

DESIGN

The UPK features square perforation. It is available with pre-drilled holes and enamelled screws. Grilles exceeding 2 m² are split.e.

MATERIALS AND SURFACE COATING

The grill is made in steel, and comes in a RAL 9010 finish. It is fitted with polyurethane moulding. Other materials and colours are available on request.

QUICK SELECTION

In terms of projected WxH for the UPK, duct velocity should not exceed 3 m/s. This is to avoid any noise issues.

ORDER CODE, UPK

Product **UPK - 800 - 900 / 0** SL = Special finish
B = Width from and incl. 100, max. 2000 (1000)
H = Height from and incl. 100, max. 1000 (2000)
(Max. area in total: 2 m² per grille)

Example:
UPK-800-900 / 0
Explanation:
UPK, width: 800 and height: 900

DIMENSIONS AND WEIGHT, UPK


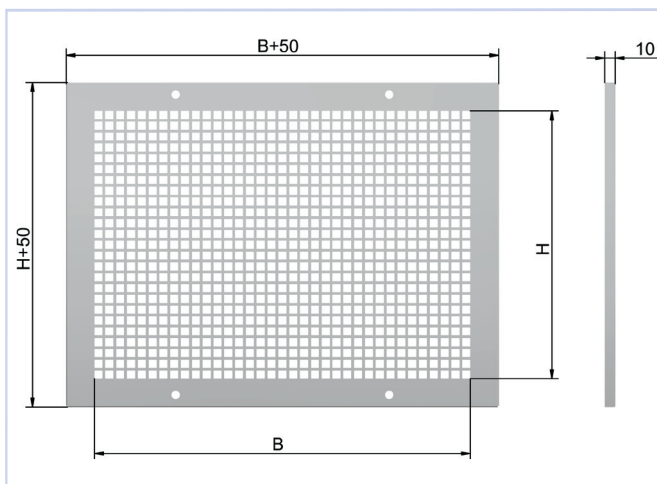


Fig. 1

UPK is developed and manufactured by:

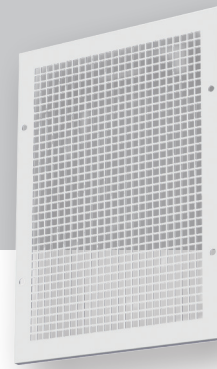

INSTALLATION

Installation principle is shown in fig. 2.

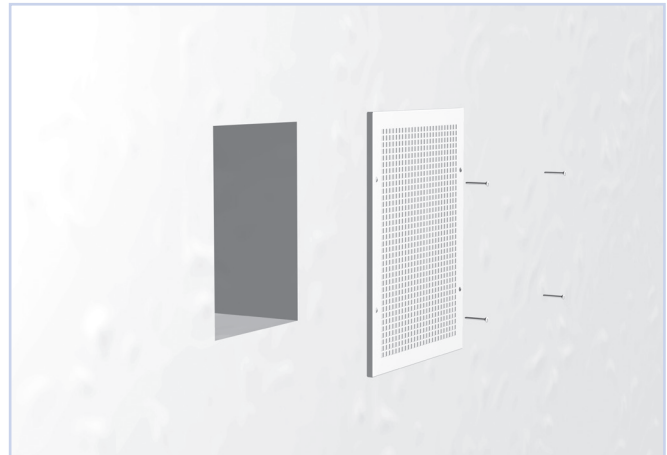


Fig. 2: Installation

COMMISSIONING

A separate measurement and adjustment unit for commissioning is recommended.

MAINTENANCE

The valve can be cleaned by using a damp cloth.

ENVIRONMENT

Enquiries regarding product declaration can be directed to our sales team, or information can be found at our website: www.trox.no

The company reserves the right to make amendments without prior notice.