


UPK

Extract-air grille

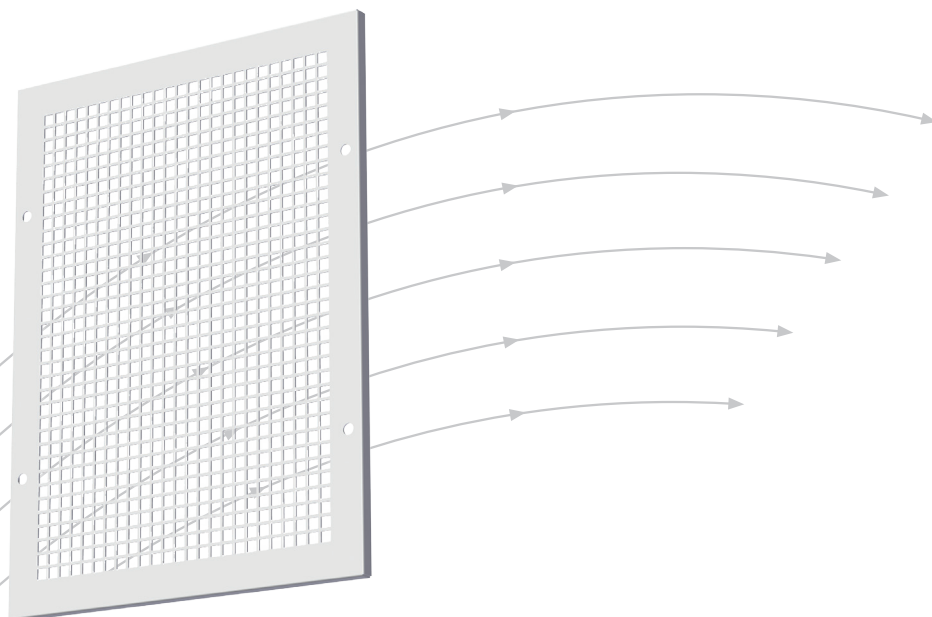

- Bespoke dimensions, BxH variants
- Available with and without plenum box

TROX[®] TECHNİK

 **Auranor**

TROX Auranor Norge AS

PO Box 100
NO-2760 Brandbu

Telefon +47 61 31 35 00
Telefaks+47 61 31 35 10
e-mail: firmapost@auranor.no
www.trox.no

UPK (BxH)

APPLICATION

UPK is an air-extract grille for wall mounting. It is available in bespoke dimensions and can thus be adapted to fit various groove dimensions or pre-installed boxes.

DESIGN

The UPK features square perforation. It is available with pre-drilled holes and enamelled screws. Grilles exceeding 2 m² are split.e.

MATERIALS AND SURFACE COATING

The grill is made in steel, and comes in a RAL 9010 finish. It is fitted with polyurethane moulding. Other materials and colours are available on request.

QUICK SELECTION

In order to avoid noise problems, a projected duct velocity above 4 m/s is not recommended.

ORDER CODE, UPK

Product **UPK - 800 - 900 / 0** SL = Special finish
B = Width from and incl. 100, max. 2000 (1000)
H = Height from and incl. 100, max. 1000 (2000)
(Max. area in total: 2 m² per grille)

Example:
UPK-800-900 / 0
Explanation:
UPK, width: 800 and height: 900

DIMENSIONS AND WEIGHT, UPK


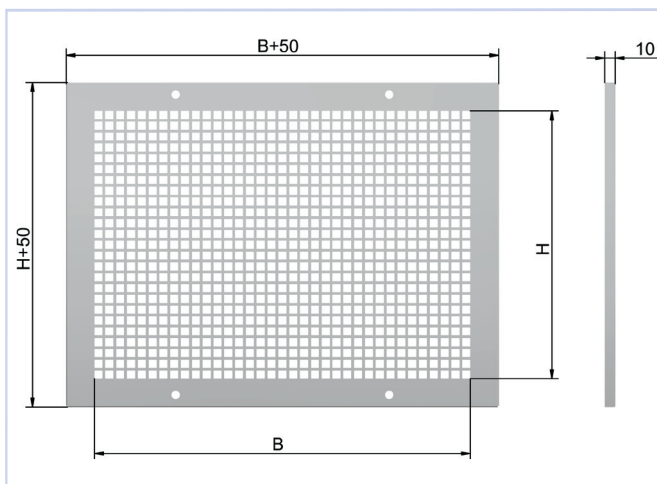


Fig. 1

UPK is developed and manufactured by:

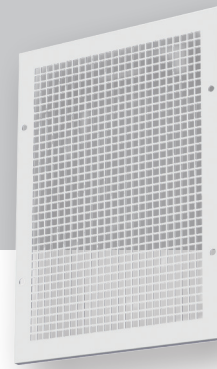

INSTALLATION

Installation principle is shown in fig. 2.

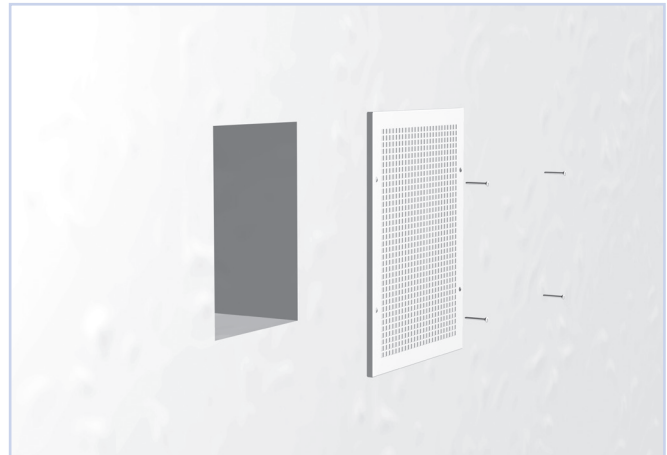


Fig. 2: Installation

COMMISSIONING

A separate measurement and adjustment unit for commissioning is recommended.

MAINTENANCE

The valve can be cleaned by using a damp cloth.

ENVIRONMENT

Enquiries regarding product declaration can be directed to our sales team, or information can be found at our website: www.trox.no

The company reserves the right to make amendments without prior notice.