

SIV-INN T/V

- Suitable for T-profile ceiling system
- Removable front
- Large capacity

APPLICATION

Siv-inn T/V is a supply diffuser for areas requiring high air flow rates such as commercial kitchens or laboratories. Suitable for open as well as embedded installation (see fig. 2).

Design

The product is available in 6 different sizes, with circular end-spigot as standard. External dimensions are designed to fit T-profile ceiling systems with module 600. Alternative connection solutions and positioning are available on request. Siv-inn T/V can also be supplied with perforated sides. The front panel is reinforced and can be removed by unfastening the screws.


DESCRIPTION

Materials and surfaces

Siv-inn T/V comes in a galvanised steel-plate design. Sides and front are in a white RAL 9003 - gloss 30 finish.

TECHNICAL INFORMATION

ORDER CODE, Siv-inn T/V

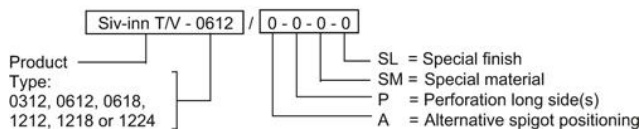

Example:

Siv-inn T/V-0612 / 0-0-0-0

Explanation:

Siv-inn T/V, type: 0612 with spigot Ø250.

 QUICK SELECTION

Siv-inn TV	[m ³ /h]		
	25 dB(A)	30 dB(A)	35 dB(A)
0312	230	300	430
0612	340	470	580
0618	540	680	860
1212	700	900	1200
1218	1000	1200	1600
1224	1200	1600	2000

Table 1: The table shows air flow rates at given sound power levels.