

Louvre for central extract system

RIA-SA



Louvre for central extract system

- For high air flow rates
- Available in standard white, RAL 9003 - gloss 30



General information	2	Dimensions	4
Order code	3	Quick Sizing	5

General information

Application

RIA-SA is an extract-air louvre ideal for high air flow rates

Design

RIA-SA is made from extruded aluminium profiles.

Materials and surface coating

RIA-SA is made from extruded, seawater resistant aluminium profiles (ENAW-6060-T66 / EN-AW-6063-T6), and comes in an RAL 9003 - gloss finish as standard. The unit can also be delivered in anodized brown, black or natural. Alternative materials or enamel finish are available on request.

Installation

RIA-SA is designed for wall mounting. "Upside down" installation of the louvre is recommended to avoid see-through issues.

Maintenance

Unit can be cleaned with a damp cloth.

Environment

- Enquiries regarding product declaration can be directed to our sales team, or information can be found at our website: www.trox.no



Order code

RIA-SA / 500 x 800 / P1 - RAL 9010

| | | |
1 2 3 4

1 Type
RIA-SA external weather louvres

200 – 2000

2 Width [mm]
200 – 2000


4 Exposed surface
No entry: powder-coated, RAL 9003 (signal white)
UL without coating
P1 powder-coated, specify RAL colour
PS powder-coated, specify NCS colour

3 Height [mm]

Order example: RIA-SA/500x800/P1-RAL9010

Type	RIA-SA – external weather louvres
Width [mm]	500
Height [mm]	800
Exposed surface	powder-coated, RAL 9010 (pure white)

Dimensions

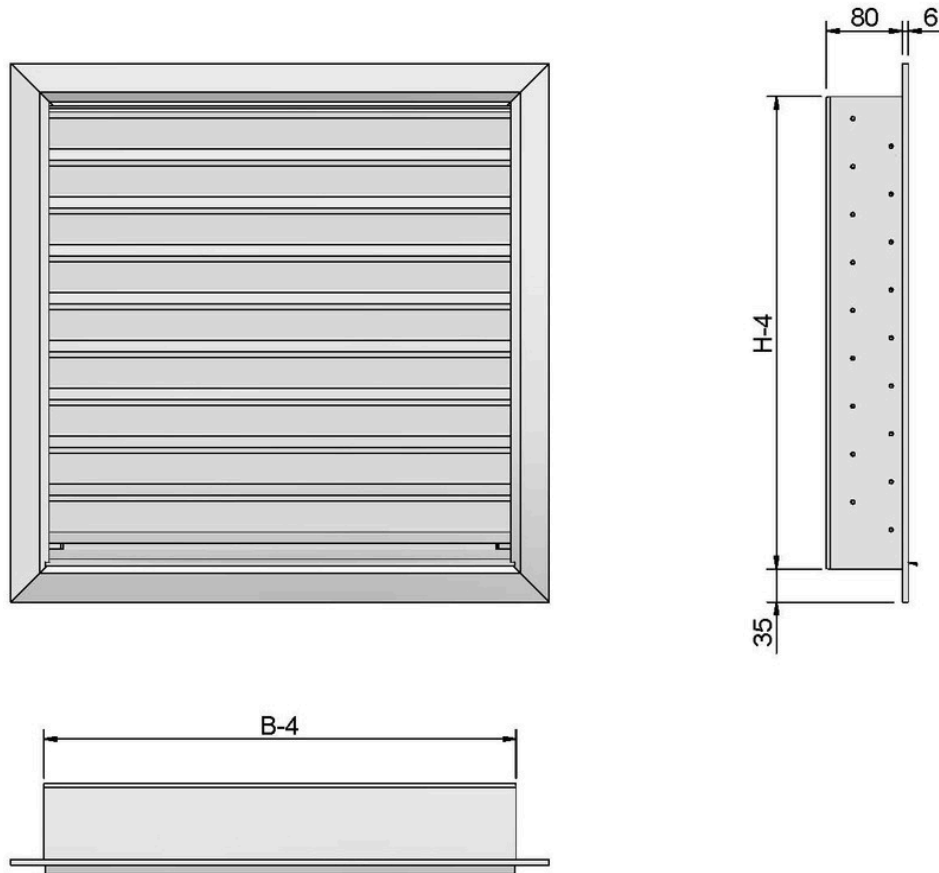

Weight: approx. 15 kg/m²

Minimum dimension: 200 × 200

Maximum dimension, not split: 2000 × 2000

Quick Sizing

RIA-SA intake

