
Mesh grille / Nettingrist



- Installation friendly
- · Available with and without decorative flange

TRO TECHNIK

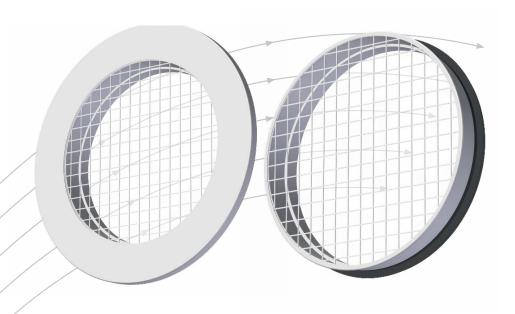


TROX Auranor Norge AS

Auranorvegen 6 NO-2770 Jaren Telephone +47 61 31 35 00

e-mail: firmapost@auranor.no www.trox.no

Mesh grille / Nettingrist





Nettingrist is a circular mesh grille, and can be used as both a supply and extract air unit.


** DESIGN

Nettingrist is available in two different designs - with or without decorative flange.

MATERIALS AND SURFACE COATING

Nettingrist is made of galvanised steel, and units with decorative flange comes in a RAL 9003 - gloss 30 finish as standard. Both designs are fitted with rubber gasket. Nettingrist with flange in the dim. Ø500 and Ø630 are delivered with mounting holes in the flange and screws. Nettingrist without flange is available in dim. Ø100 to Ø1000. Nettingrist with flange is available in dim. Ø100 to Ø630.

S ORDER CODE, NETTINGRIST



Example

Nettingrist-160 / P / 0

Explanation:

Nettingrist, dim. Ø160 with decorative flange white RAL 9003 - gloss 30 finish.

A DIMENSIONS AND WEIGHT, NETTINGRIST

NETTINGRIST			Decorative flange		Weight [kg]	
Dim.	D1	D2	D 3	A- weighting	Without flange	With flange
100	99	105	209	70	0,05	0,20
125	124	132	209	65	0,08	0,23
160	159	167	243	62	0,20	0,38
200	199	207	278	64	0,25	0,47
250	249	258	334	75	0,30	0,56
315	314	325	418	75	0,45	0,77
400	399	410	525	75	0,70	1,10
500	498	510	644	56	0,90	1,40
630	628	640	774	56	1,40	2,00
800	798	810	-	75	1,60	-
1000	998	1010	-	75	2,00	-

Table 1




Fig. 1

P INSTALLATION

Can be installed directly in Spiro duct.

☑ MAINTENANCE

Can be cleaned with a damp cloth or vacuum cleaner as required.

* ENVIRONMENT

Enquiries regarding product declaration can be directed to our sales team, or information can be found at our website: www.trox.no

The company reserves the right to make amendments without prior notice.

