

TIH

- TIH – for wall or ductwork installation
- Suitable for both cooling and heating purposes

APPLICATION

The TIH diffuser is ideal for industrial premises as well as department stores, garage facilities and similar.

Design

Available in 3 different designs and sizes, and comes with internal diffuser plate as standard. TIH-1 for circular-duct connection (see fig. 1), TIH-2 for flat-duct connection and TIH-3 with circular connection collar. Annular design is available on request. NB! Remember to specify connection diameter (D2, fig. 2) when ordering TIH-1.

DESCRIPTION

Materials and surfaces


Comes in a galvanised, steel-plated finish. Other materials and colours are available on request.

INSTALLATION

TIH-1 and 2 are equipped with flange for attachment to duct.

TECHNICAL INFORMATION

Order code, TIH

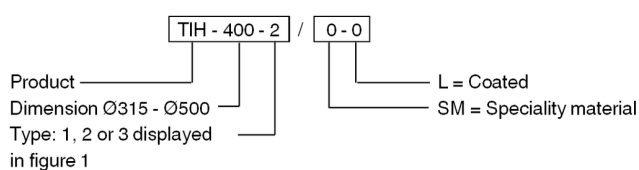

Example:

TIH-400-2 / 0-0

Explanation:

TIH dim. Ø400 type 2.

TIR	[m ³ /h]		
Dim.	30 dB(A)	35 dB(A)	40 dB(A)
315	1370	1620	1870
400	1800	2090	2500
500	2500	2900	3300
630	3300	4100	4700
800	4900	5800	6700

TIH	[m ³ /h]		
Dim.	30 dB(A)	35 dB(A)	40 dB(A)
315	830	1060	1300
400	1200	1500	2000
500	1700	2200	2700

TROX Auranor Norge AS



Po.Box 100
 NO-2712 Brandbu
 Grimsdal 10
 NO-2760 Brandbu
 Phone +47 61 31 35 00
firmapost@auranor.no

Online-Services

- › Your contact partner
- › Sales brochures

Service-Hotlines

TROX Auranor Norge as
 +47 61 31 35 00
[Contact](#)

TROX IN SOCIAL WEB