

SIV-INN 2

- Even air distribution
- Large capacity
- Rectangular and circular design

APPLICATION □

Siv-inn 2 is designed for displacement ventilation in industrial buildings.

Design

Comes with a top-entry spigot, and is available in a rectangular as well as a 1/4, 1/2 and 1/1 curved design.

DESCRIPTION □

Materials and surfaces


All parts are in a steel design. The unit is delivered in a galvanized steel finish as standard, but is also available in special material and/or in a painted finish.

INSTALLATION □

Siv-inn 2 is fitted to a connecting duct, and can be left free-standing or mounted to a wall.


TEKNISK INFORMATION

ORDER CODE, Siv-inn 2. 1/4R, 1/2R and 1/1R

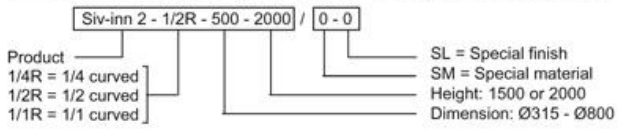

Example:
 Siv-inn 2-1/2R-500-2000 / 0-0
 Explanation:
 Siv-inn 2-1/2 curved, dimension Ø500 and height 2000

ORDER CODE, Siv-inn 2. Rectangular

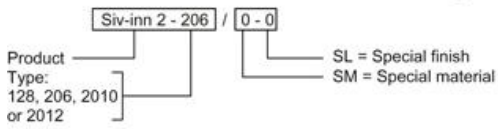

Example:
 Siv-inn 2-206 / 0-0
 Explanation:
 Siv-inn 2 type 206

Siv-inn 2	[m ³ /h]		
Dim.	35 dB(A)	40 dB(A)	45 dB(A)
315	1370	1550	2000
400	2000	2450	3000
500	3100	4000	4700
630	4700	5700	6500
800	5800	6800	8300

Siv-inn 2	[m ³ /h]		
Type	35 dB(A)	40 dB(A)	45 dB(A)
128	540	630	810
206	828	954	1152
2010	1278	1584	1980
2012	1602	1980	2340