



## USI

- Large capacity
- Available with integrated sound attenuator
- Cleanable
- Easy installation - ideal for renovation work
- Suitable for schools and large premises
- Dimensions from Ø200 - Ø500

### APPLICATION □

The USI extract air terminal is intended for open installation. It is suitable for high air flow rates, and can thus be used as a central extraction unit in large rooms - ideal in combination with VAV.

#### Design

The valve is available with and without integrated sound attenuator.


### DESCRIPTION □

#### Materials and surfaces

The device is made of galvanised steel, and comes in RAL 9003 - gloss 30. Other colours are available on request.

## TEKNISK INFORMATION

### ORDER CODE, USI

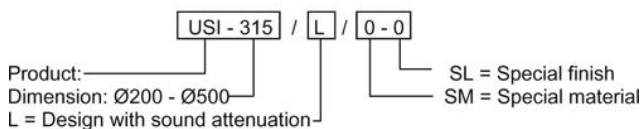

#### Example:

USI-315 / L / 0-0

#### Explanation:

USI dim. Ø315, with sound attenuation

 QUICK SELECTION

USI	[m <sup>3</sup> /h]		
	25dB(A)	30dB(A)	35dB(A)
200	396	490	605
250	662	796	954
315	896	1087	1318
400	1786	2124	2525
500	2228	2804	3528