

## LKK

- Easy installation
- Dimensions, pressure drop and sound attenuation to suit every requirement.
- Included in the "Attenuator Selection" computer program

## APPLICATION

---

LKK is a rectangular sound attenuator for installation in rectangular ducting.

### Design

LKK is a rectangular steel unit featuring internal vertical splitters with mineral wool with a glass fibre layer inside. The unit is equipped with a flanged connection at each end. LKK is available in heights from 400 mm to 3000 mm (100 mm increments), and in widths from 600 mm to 3000 mm (100 mm increments), and in lengths of 640, 1240, 1500, 1800 and 2480 mm. 1880 and 2480 mm systems are delivered as two-piece units. An LKK-V version is also available, and is a sound attenuator with connection collars forming a right angle in order to accommodate a right-angled bend. LKK and LKK-V complies air tightness class B.

## DESCRIPTION


---

### Materials and surface coating

LKK is delivered in a galvanised steel design. The flanged joint is equipped with a polyethylene gasket. Splitters with mineral wool with a glass fibre layer have been fitted inside.


## TEKNISK INFORMATION

## ORDER CODE, LKK

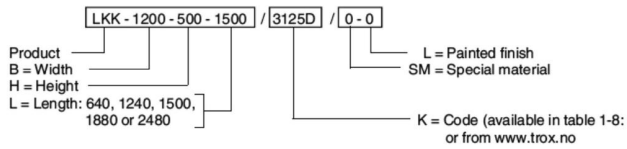

Example:  
LKK-1200-500-1500 / 3125D / 0-0  
Explanation:  
LKK, width 1200, height 500, length 1500, code: 3125D.

## ORDER CODE, LKK-V



Example:  
LKK-V-1200-600-300-300 / 0-0  
Explanation:  
LKK-V, width 1200, height 600, IN dimension 300 and OUT dimension 300.

In order to ensure optimum splitter combination, an "Attenuator Selection" computer program has been developed and is available for download from our website: [www.trox.no](http://www.trox.no)